

SKID PLATE YAMAHA YZ 125SOTTOMOTORE YAMAHA YZ 125






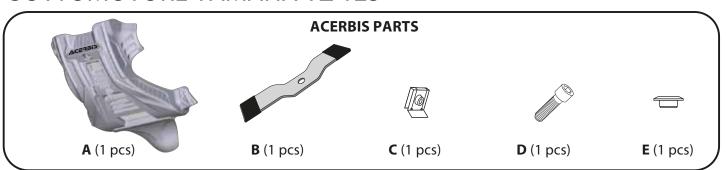

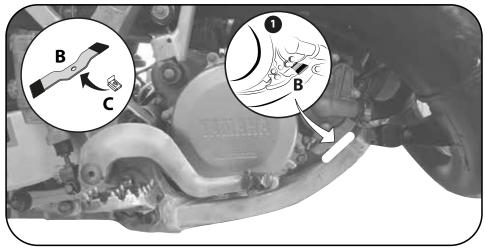

- 1 Attach the threaded C-Clip (C) to the Bracket (B) and then position the bracket behind the frame as indicated in the image.
- 1 Inserire la clips (C) sulla staffa (B). Posizionare la staffa (B) nella posizione 1 indicata in figura.

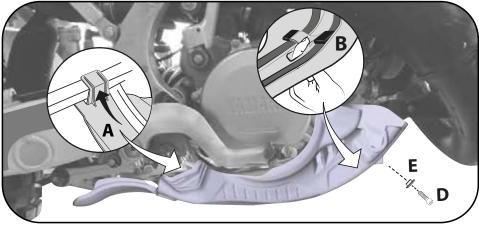

- 2 Hook the back of the skid plate over the frame as indicated in the image and push the skid plate firmly against the frame. Using the index finger, reach through the skid plate and position the Bracket (B) as indicated in the image. Insert the (E) Bushing and (D) bolt and tighten firmly.
- 2 Inserire il gancio del sottomotore (A) nel telaio. Spingere il sottomotore (A) contro il telaio. Aiutandosi con il dito della mano, tenere in posizione la staffa (B), inserire la boccola (E), la vite (D) e bloccare.

WARNING

Use at your own risk. Check the security of your device before you ride. Be sure that you follow the instructions installing the Acerbis products. Do not ride if there is missing or damaged hardware. If this is the case, take the item immediately back to your dealer. Make sure the throttle and other controls are free every time you ride. Lack of attention to instruction and warning could lead to interference with the controls, loss of control, and an accidents. Acerbis recommends that installation must be done by a licensed mechanic and that only Acerbis is original parts are used during fitting. Acerbis makes no guarantees or representations, express or implied, regarding the fitness of its products for any particular purpose. Acerbis makes no guarantees or representations, express or implied, regarding the extent to which its product protect individuals or property from injury or death or damage.